

## REEL TAPING SPECIFICATIONS FOR SURFACE MOUNT DEVICES - MINI DIP

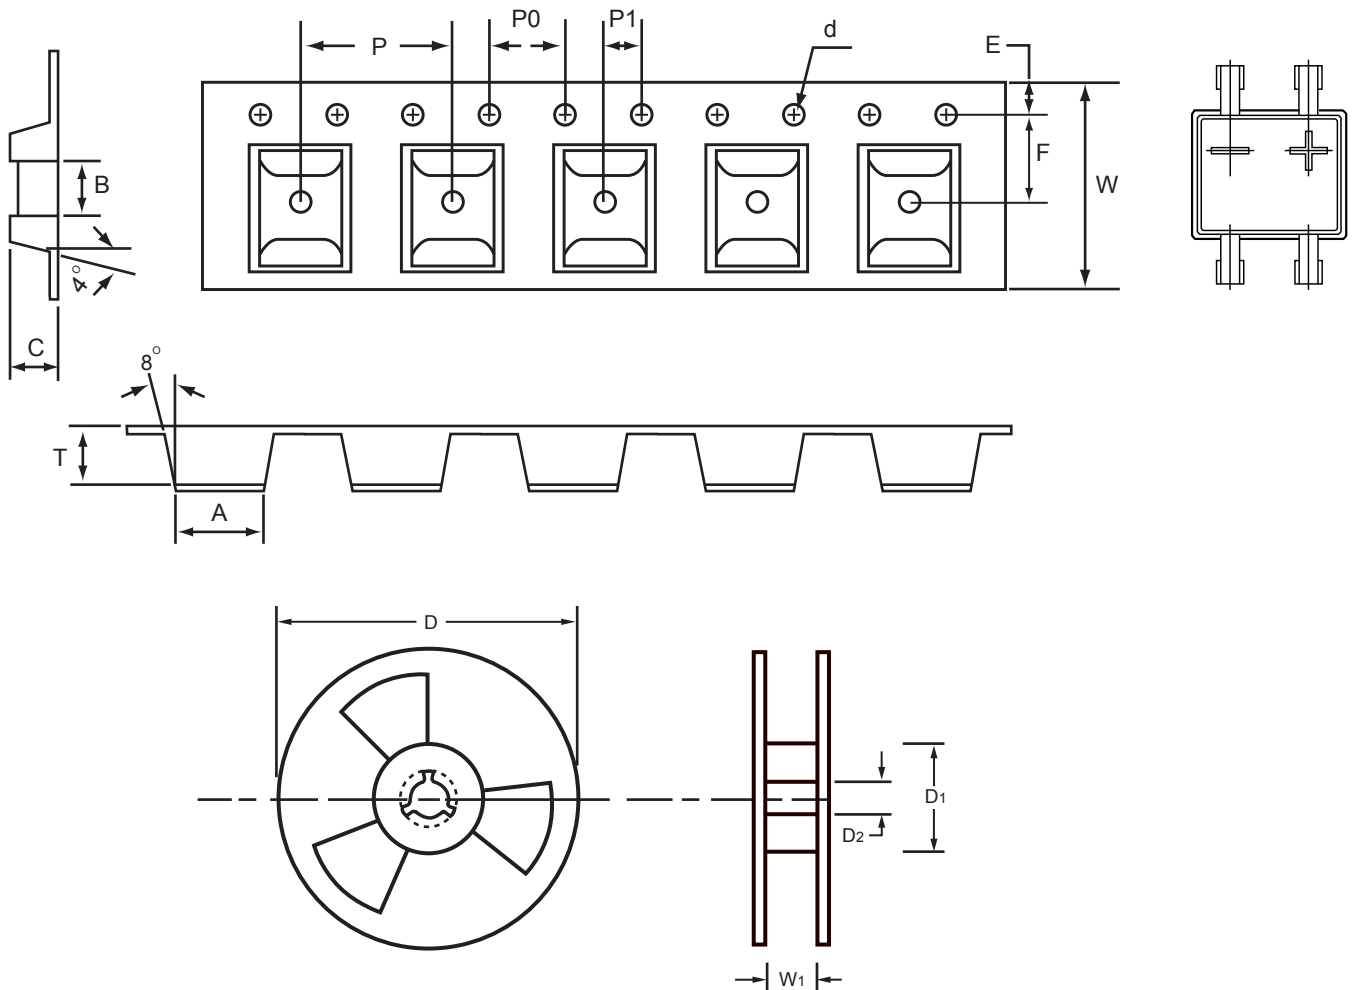


Fig.: Configuration of MINI DIP REEL TAPING

ITEM	SYMBOL	SPECIFICATIONS (mm)	SPECIFICATIONS (inch)
Carrier width	A	5.0±0.1	0.197±0.004
Carrier length	B	3.2±0.1	0.126±0.004
Carrier depth	C	2.9±0.1	0.114±0.004
Sprocket hole	d	1.5±0.1/-0	0.059±0.004
Reel outside diameter	D	178±2.0	7.008±0.079
Reel inner diameter	D1	8.0±0.2	0.315±0.008
Feed hole diameter	D2	13±0.5	0.512±0.020
Sprocket hole position	E	1.75±0.1	0.069±0.004
Punch hole position	F	5.5±0.5	0.217±0.020
Punch hole pitch	P	8.0±0.1	0.315±0.004
Sprocket hole pitch	P0	4.0±0.1	0.157±0.004
Embossment center	P1	2.0±0.05	0.079±0.002
Overall tape thickness	T	2.65±0.1	0.104±0.004
Tape width	W	12.0+0.3/-0.1	0.472+0.012/-0.004
Reel width	W1	16.8±2.0	0.661±0.079

Notes : 1.Devices are packed in accordance with EIA stand RS-481-A and specifications listed above.  
2.Available on 7 inch ( 500 c.t. ) or 13 inch ( 3000 c.t. ) diameter reels.