

The application of 4M change

Supplier: Zhe Jiang Rectron Electronic Co., Ltd

Date: 2018-10-26

Item	RL251-RL257	Supplier					
P/N	RL251-RL257	GM	SALE	PURCHASE	PE	GRA	Prepared
		Richard	Robert	LH LU	Dick	Mark	Mark


Class. Material Machine/Tooling Method Manufacture site
 Man

Change Level High Low

Description:

- 1) Device body marking change from "RL251", "RL252" etc to "RL25H".
- 2) Maximum Recurrent Peak Reverse Voltage (Vrrm) rating upgraded as below.

RL251 from 50V to 1000V	RL254 from 400V to 1000V	RL256 from 800V to 1000V
RL252 from 100V to 1000V	RL255 from 600V to 1000V	RL257 no change
RL253 from 200V to 1000V		
- 3) No other fit, form or function changes
- 4) If the customer disagrees with the change, We will use Z to distinguish the material number.
- 5) P/O: P/N-packing code-Z; Type: P/N-packing code; Remark : -Z (For example: P/O: RL251A7-F-Z; Type: RL257-F)

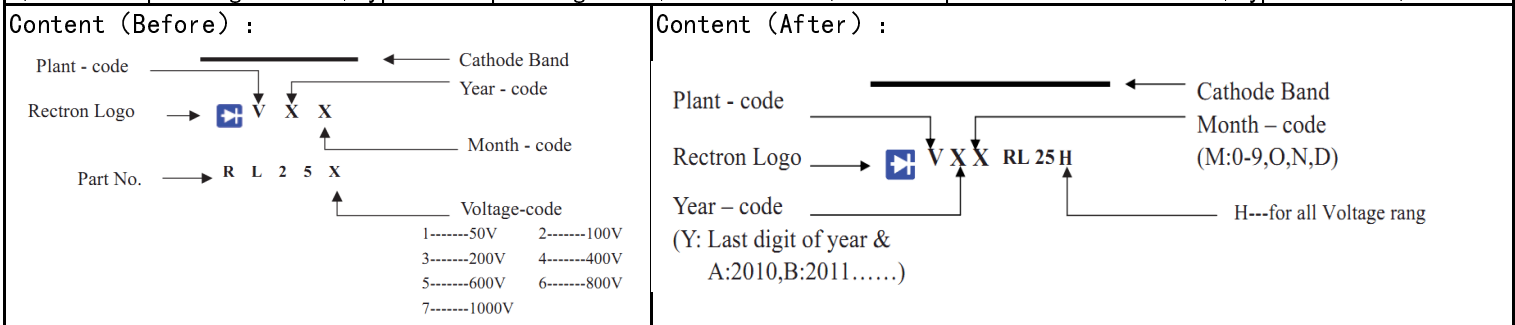

Effective Date:
Jan/1st/2019

Reason :
Improved breakdown reliability, product availability, and manufacturing efficiency.

Sample Q'ty :	Pcs	Customer Approved	
Customer opinion:			
Approved: Yes () No ()			
Approved date by customer:			