

The application of 4M change

Supplier: Zhe Jiang Rectron Electronic Co., Ltd

Date: 208-10-26

Item	1A1-1A7	Supplier					
		GM	SALE	PURCHASE	PE	QRA	Prepared
P/N	1A1-1A7						
		Richard	Robert	LH LU	Dick	Mark	Mark

Class. Material Machine/Tooling Method Manufacture site
 Man


Change Level High Low

Description:

- 1) Device body marking change from "1A1", "1A2"...etc to "1AH".
- 2) Maximum Recurrent Peak Reverse Voltage (V_{rrm}) rating upgraded as below.
1A1 from 50V to 1000V 1A4 from 400V to 1000V 1A6 from 800V to 1000V
1A2 from 100V to 1000V 1A5 from 600V to 1000V 1A7 no change
1A3 from 200V to 1000V
- 3) No other fit, form or function changes
- 4) If the customer disagrees with the change, We will use Z to distinguish the material number.
- 5) P/O: P/N-packing code-Z; Type: P/N-packing code; Remark : -Z (For example: P/O: 1A7-F-Z; Type: 1A7-F)


Content (Before) :

Marking on the body

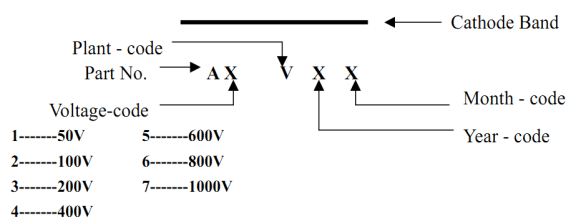

Content (After) :

Marking on the body

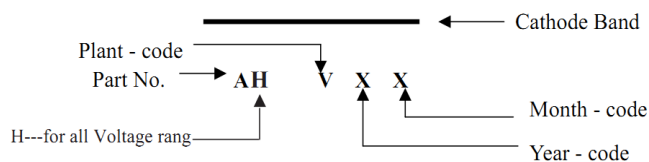

Effective Date:

Jan/1st/2019

Reason :

Improved breakdown reliability, product availability, and manufacturing efficiency.

Sample Q'ty :

Pcs

Customer Approved

Customer opinion:

Approved: Yes () No ()

Approved date by customer: