

FAST SWITCHING DIODE
VOLTAGE 75 Volts CURRENT 150 mAmperes

FEATURES

- * Flat Lead SOD-323 Small Outline Plastic Package
- * Surface Device Type Mounting
- * Fast Switching Device ($T_{rr} < 4.0nS$)
- * Moisture Sensitivity Level 1
- * General Purpose Diodes
- * Clip Bonding Construction, Good Thermal Capability
- * Pb Free Version and ROHS Compliant
- * Matte Tin(Sn) Lead Finish with Niche(Ni) Underplate
- * Band Indicates Cathode

SOD-323



Marking:T4

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Absolute Maximum Ratings (@ $T_A=25\text{ }^\circ\text{C}$ unless otherwise noted)

RATINGS	SYMBOL	1N4148WSG	UNITS
Non-Repetitive Peak Reverse Voltage	V _{RSM}	100	Volts
Repetitive Peak Reverse Voltage	V _{RRM}	75	Volts
Continuous Forward Current	I _O	150	mAmps
Repetitive Peak Forward Current	I _{FRM}	0.3	Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I _{FSM}	2	Amps
Typical Current Square Time	I ² T	0.02	A ² S
Power Dissipation	P _D	200	mW
Operating Junction Temperature	T _J	+150	°C
Storage Temperature Range	T _{STG}	-65 to + 150	°C

These ratings are limiting values above which the serviceability of the diode may be impaired.

ELECTRICAL CHARACTERISTICS (@ $T_A=25\text{ }^\circ\text{C}$ unless otherwise noted)

CHARACTERISTICS	SYMBOL	1N4148WSG	UNITS
Forward Voltage @I _F =10mA	V _F	1.0	Volts
Reverse Leakage Current @V _R =20V @V _R =75V	I _R	25 5	nAmps uAmps
Breakdown Voltage @I _R =100uA @I _R =5uA	V _R	100 75	Volts
Reverse Recovery Time (I _F =10mA, I _R =60mA, R _L =100 Ω, I _{RR} =1mA)	T _{rr}	4	nS
Capacitance (V _R =0V, f=1MHz)	C _j	4	pF

RATING AND CHARACTERISTICS CURVES (1N4148WSG)

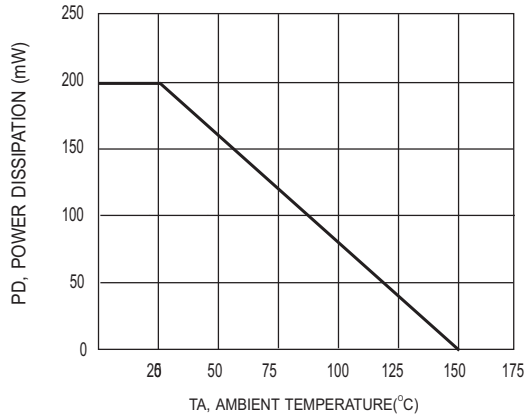


FIG.1 FORWARD DERATING CURVE

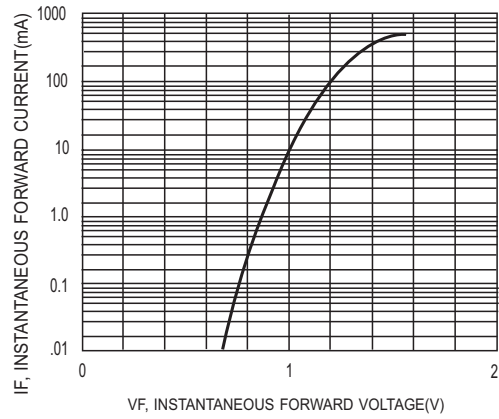


FIG.2 FORWARD CHARACTERISTICS

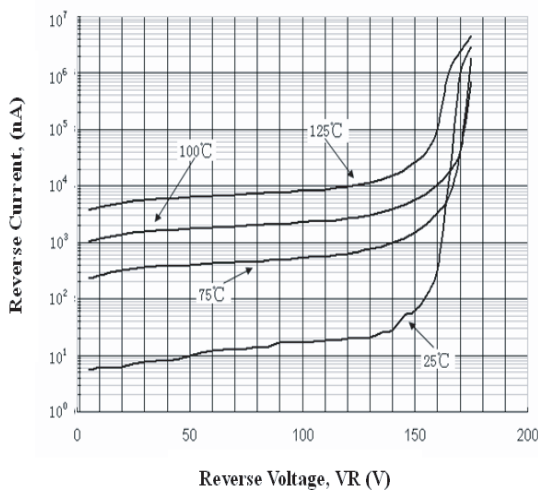


FIG.3 REVERSE CURRENT VS REVERSE VOLTAGE


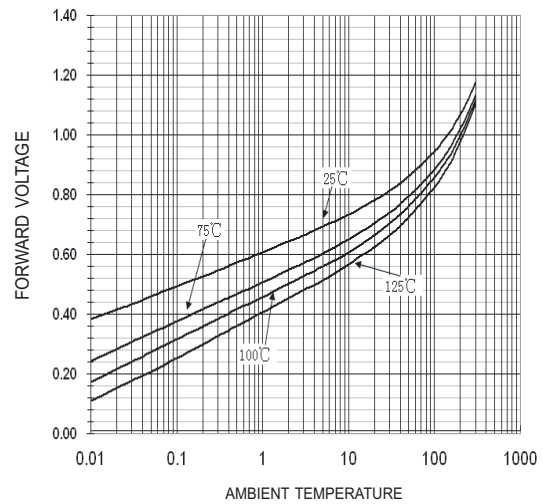


FIG.4 FORWARD VOLTAGE VS AMBIENT TEMPERATURE

SOD-323 PACKAGE OUTLINE
SOD-323

Plastic surface mounted package

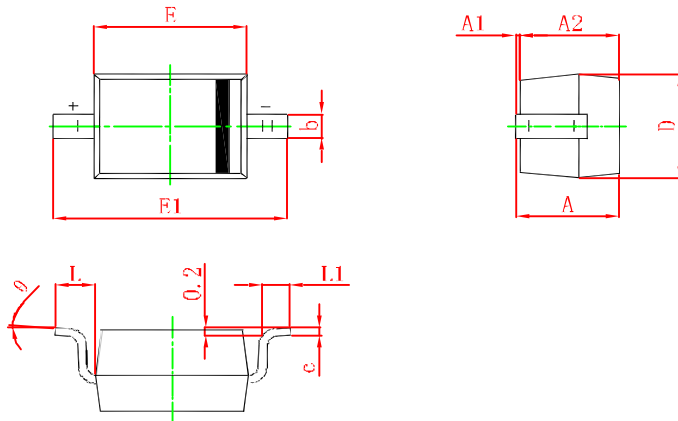

Symbol	Min.(mm)	Max.(mm)
A		1.200
A1	0.000	0.100
A2	0.800	1.100
b	0.250	0.350
c	0.080	0.150
D	1.200	1.400
E	1.600	1.800
E1	2.500	2.700
L	0.475REF	
L1	0.250	0.400
θ	0°	8°

PACKAGING OF DIODE AND BRIDGE RECTIFIERS

REEL PACK

PACKAGE	PACKING CODE	EA PER REEL	EA PER INNER BOX	COMPONENT SPACE (mm)	TAPE SPACE (mm)	REEL DIA (mm)	CARTON SIZE (mm)	EA PER CARTON	GROSS WEIGHT(Kg)
SOD-323	-T	3,000	15,000	---	---	178	390*205*31	120,000	5.17

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.