

SMALL SIGNAL DIODES

FEATURES

- * Silicon epitaxial planar diode
- * Fast switching diode
- * Also available in case SOT23 with designation BAS16
- * P/N suffix V means AEC-Q101 qualified, e.g: BAS16WV
- * P/N suffix V means Halogen-free

MECHANICAL DATA

BAS16W

Case: SOD-123 Plastic Case

Weight: approx. 0.01 g

Marking Code: A6

BAS16WS


Case: SOD-323 Plastic Case

Weight: approx. 0.004 g

Marking Code: A6

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.
resistive or inductive load.

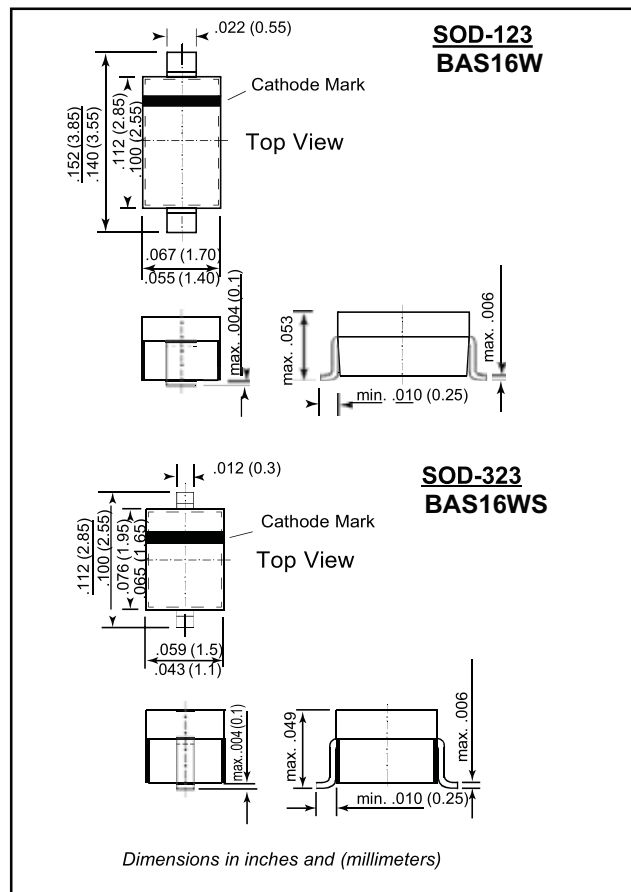

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOL	VALUE	UNIT
Reverse Voltage	V_R	75	V
Peak Reverse Voltage	V_{RM}	100	V
Forward Current (continuous)	I_F	250	mA
Non-Repetitive Peak Forward Current			
at $t=1\mu s$	I_{FSM}	2.0	A
at $t=1ms$	I_{FSM}	1.0	A
at $t=1s$	I_{FSM}	0.5	A
Power Dissipation at $T_{amb}=25^\circ C$			
BAS16W	P_{tot}	350 ¹⁾	mW
BAS16WS		200 ¹⁾	mW
Maximum Junction Temperature	T_j	150	°C
Storage Temperature Range	T_s	-65 to +150 ¹⁾	°C

¹⁾Valid provided electrodes are kept at ambient temperature.

ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified

	Symbol	Min.	Typ.	Max.	Unit
Forward Voltage					
at $I_F = 1 \text{ mA}$	V_F	–	–	715	mV
at $I_F = 10 \text{ mA}$	V_F	–	–	855	mV
at $I_F = 50 \text{ mA}$	V_F	–	–	1.00	V
at $I_F = 150 \text{ mA}$	V_F	–	–	1.25	V
Leakage Current					
at $V_R = 25 \text{ V}$, $T_j = 150 \text{ °C}$	I_R	–	–	30	μA
at $V_R = 75 \text{ V}$	I_R	–	–	1	μA
at $V_R = 75 \text{ V}$, $T_j = 150 \text{ °C}$	I_R	–	–	50	μA
Capacitance	C_{tot}	–	–	2	pF
at $V_R = 0$; $f = 1 \text{ MHz}$					
Reverse Recovery Time	t_{rr}	–	–	6	ns
from $I_F = 10 \text{ mA}$ to $I_R = 10 \text{ mA}$ $I_R = 1 \text{ mA}$, $R_L = 100\Omega$					
Thermal Resistance					
Junction to Ambient Air	R_{thJA}	–	–	375 ¹⁾ 650 ¹⁾	$^{\circ}\text{C/W}$ $^{\circ}\text{C/W}$
	BAS16W BAS16WS				

¹⁾Valid provided that electrodes are kept at ambient temperature

PACKAGING OF DIODE AND BRIDGE RECTIFIERS

REEL PACK

PACKAGE	PACKING CODE	REEL (EA)	COMPONENT SPACE(mm)	TAPE SPACE (mm)	REEL DIA (mm)	CARTON SIZE (mm)	EA PER CARTON	GROSS WEIGHT(Kg)
SOD-123	-T	3,000	---	---	178	390*205*310	120,000	5.29

REEL PACK

PACKAGE	PACKING CODE	EA PER REEL	EA PER INNER BOX	COMPONENT SPACE (mm)	TAPE SPACE (mm)	REEL DIA (mm)	CARTON SIZE (mm)	EA PER CARTON	GROSS WEIGHT(Kg)
SOD-323	-T	3,000	15,000	---	---	178	390*205*31	120,000	5.17

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.