

## Dual Line CAN Bus Protector

### DESCRIPTION

The RSM24M has been designed to protect the CAN transceiver in high-speed and fault tolerant networks from ESD and other harmful transient voltage events. This device provides bidirectional protection for each data line with a single compact SOT-23 package, giving the system designer a low cost option for improving system reliability and meeting stringent EMI requirements.

### ORDERING INFORMATION

- ✧ Device: RSM24M
- ✧ Package: SOT-23
- ✧ Marking: C24
- ✧ Material: Halogen free
- ✧ Packing: Tape & Reel
- ✧ Quantity per reel: 3,000pcs

### APPLICATIONS

- ✧ Industrial Control Networks
- ✧ Smart Distribution Systems
- ✧ Automotive Networks
- ✧ Low and High-Speed CAN
- ✧ Fault Tolerant CAN


### MACHANICAL DATA

- ✧ SOT-23 package
- ✧ Flammability Rating: UL 94V-0
- ✧ Packaging: Tape and Reel
- ✧ High temperature soldering guaranteed: 260°C/10s
- ✧ Reel size: 7 inch

### FEATURES

- ✧ IEC61000-4-2 (ESD)  $\pm 30\text{kV}$  (air),  $\pm 20\text{kV}$  (contact)
- ✧ IEC61000-4-4 (EFT) 40A (5/50ns)
- ✧ IEC61000-4-5 (Lighting) 3A (8/20 $\mu\text{s}$ )
- ✧ 200 Watts Peak Pulse Power per (tp=8/20 $\mu\text{s}$ )
- ✧ Working voltages : 24V
- ✧ Low clamping voltage
- ✧ Low leakage current
- ✧ P/N suffix V means AEC-Q101 qualified, e.g:RSM24MV
- ✧ P/N suffix V means Halogen-free

### PIN CONFIGURATION



### PACKAGE OUTLINE




**ABSOLUTE MAXIMUM RATING (Tamb=25°C, unless otherwise specified)**

Symbol	Parameter	Value	Units
$V_{ESD}$	ESD per IEC 61000-4-2 (Air)	±30	kV
	ESD per IEC 61000-4-2 (Contact)	±20	
$P_{PP}$	Peak Pulse Power (8/20µs)	200	W
$T_{OPT}$	Operating Temperature	-55/+150	°C
$T_{STG}$	Storage Temperature	-55/+150	°C
$T_L$	Lead Soldering Temperature	260 (10 sec.)	°C


**ELECTRICAL CHARACTERISTICS (Tamb=25°C, unless otherwise specified)**

Symbol	Parameter	Test Condition	Min	Typ	Max	Units
$V_{RWM}$	Reverse Working Voltage	Pin 1,2 to Pin3			24	V
$V_{BR}$	Reverse Breakdown Voltage	$I_T = 1mA$ Pin 1,2 to Pin3	26		32	V
$I_R$	Reverse Leakage Current	$V_{RWM} = 24V$ Pin 1,2 to Pin3			1	µA
$V_{C1}$	Clamping Voltage 1	$I_{PP} = 1A, t_p = 8/20\mu s$ Pin 1,2 to Pin3			36	V
$V_{C2}$	Clamping Voltage 2	$I_{PP} = 3A, t_p = 8/20\mu s$ Pin 1,2 to Pin3			50	V
$C_J$	Junction Capacitance	$V_R = 0V, f = 1MHz$ Pin 1,2 to Pin3		13	17	pF

## RATING AND CHARACTERISTICS CURVES (RSM24M)



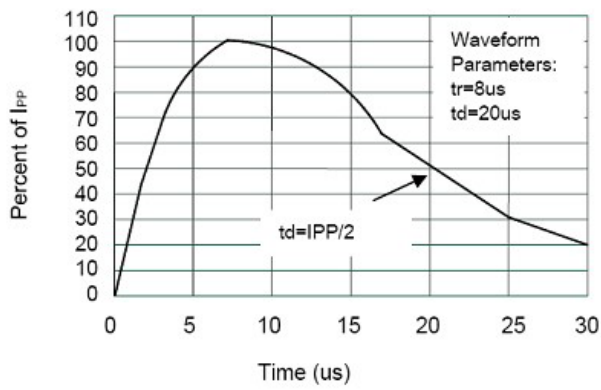


Pulse Waveform

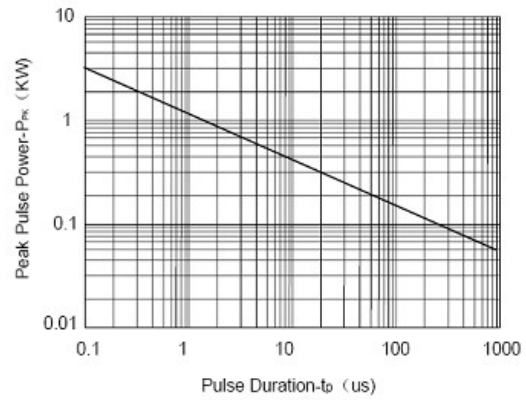

Non-Repetitive Peak Pulse Power vs. Pulse Time

## SOT-23 PACKAGE OUTLINE DIMENSIONS



DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	0.89	1.00	1.11	0.035	0.040	0.044
A1	0.01	0.06	0.10	0.001	0.002	0.004
b	0.37	0.44	0.50	0.015	0.018	0.020
c	0.09	0.13	0.18	0.003	0.005	0.007
D	2.80	2.90	3.04	0.110	0.114	0.120
E	1.20	1.30	1.40	0.047	0.051	0.055
e	1.78	1.90	2.04	0.070	0.075	0.081
L	0.35	0.54	0.69	0.014	0.021	0.029
H <sub>E</sub>	2.10	2.40	2.64	0.083	0.094	0.104

## DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.