

Common Anode Zeners for ESD Protection

DESCRIPTION

The dual monolithic silicon Zener diodes are designed for applications requiring transient overvoltage protection capability. They are intended for use in voltage and ESD sensitive equipment such as computers, printers, business machines, communication systems, medical equipment and other applications. Their dual junction common anode design protects two separate lines using only one package. These devices ideal for situations where board space is at a premium.


ORDERING INFORMATION

- ✧ Device: TEPxxAL Series
- ✧ Package: SOT-23
- ✧ Material: RoHS Compliant
- ✧ Packing: Tape & Reel
- ✧ Quantity per reel: 3,000pcs

MACHANICAL DATA

- ✧ SOT-23 package
- ✧ Flammability Rating: UL 94V-0
- ✧ Packaging: Tape and Reel
- ✧ High temperature soldering guaranteed: 260°C/10s
- ✧ Reel size: 7 inch

PIN CONFIGURATION




FEATURES

- ✧ SOT-23 package allows either two separate unidirectional configurations or a single bidirectional configuration.
- ✧ Working peak reverse voltage 3V to 22V
- ✧ Standard Zener breakdown voltage 5.6V to 27V
- ✧ Peak power 24 or Watts @ 1.0ms (unidirectional) per Figure 6 Waveform
- ✧ ESD Rating:
 - Class 3B (>16kV) per the Human Body Model
 - Class C (>400V) per Machine Model
- ✧ ESD Rating of IEC61000-4-2 level 4, ± 30 kV contact Discharge
- ✧ Low leakage < 5.0 μ A
- ✧ P/N suffix V means AEC-Q101 qualified, e.g: TEP5V6ALV
- ✧ Halogen-free

APPLICATIONS

- ✧ Computers
- ✧ Printers
- ✧ Business Machines
- ✧ Communication systems
- ✧ Medical equipment

PACKAGE OUTLINE



ABSOLUTE MAXIMUM RATING

Symbol	Parameter	Value	Units
P_{PK}	Peak Power Dissipation @1.0ms TEP5V6AL -TEP6V8AL TEP12AL-TEP27AL	24 40	W
P_D	Total Power Dissipation	200	mW
T_{OPT}	Operating Temperature	-55/+150	°C
T_{STG}	Storage Temperature	-55/+150	°C

24 WATTS

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}C$)

Part Number	Device Marking	V_{RWM}	I_R	V_{BR}			Z_{ZT}	Z_{ZK}		V_C		
		(V)	(μA)	(V)			(Ω)	(Ω)	(mA)	(V)	(A)	
			@ V_{RWM}	Min	Nom	Max	@ I_T	Max @ I_{ZT}	Max	@ I_{ZK}	Max	@ I_{PP}
TEP5V6AL	5A6	3.0	5.0	5.32	5.6	5.88	20	11	1600	0.25	8.0	3.0
TEP6V2AL	6A2	3.0	0.5	5.89	6.2	6.51	1.0	--	--	--	8.7	2.76
TEP6V8AL	6A8	4.5	0.5	6.46	6.8	7.14	1.0	--	--	--	9.6	2.5

$V_F=0.9V$ Max @ $I_F=10mA$

40 WATTS

ELECTRICAL CHARACTERISTICS ($T_{amb}=25^{\circ}C$)

Part Number	Device Marking	V_{RWM}	I_R	V_{BR}				V_C (note1)	
		(V)	(nA)	(V)			(mA)	(V)	(A)
			@ V_{RWM}	Min	Nom	Max	@ I_T	Max	@ I_{PP}
TEP12AL	12A	8.5	200	11.40	12	12.60	1	17	2.35
TEP15AL	15A	12.0	50	14.25	15	15.75	1	21	1.90
TEP18AL	18A	14.5	50	17.10	18	18.90	1	25	1.60
TEP27AL	27A	22.0	50	25.65	27	28.35	1	40	1.0

$V_F=0.9V$ Max @ $I_F=10mA$

Note 1: Surge Current waveform per Figure 5

RATING AND CHARACTERISTICS CURVES (TEPxxAL)

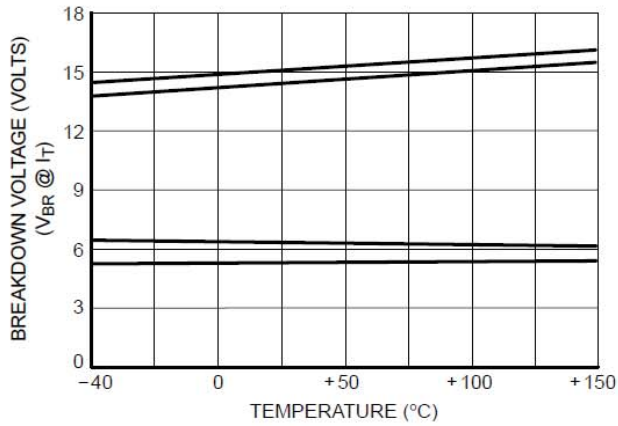


Figure 1. Typical Breakdown Voltage versus Temperature

(Upper curve for each voltage is bidirectional mode, lower curve is unidirectional mode)

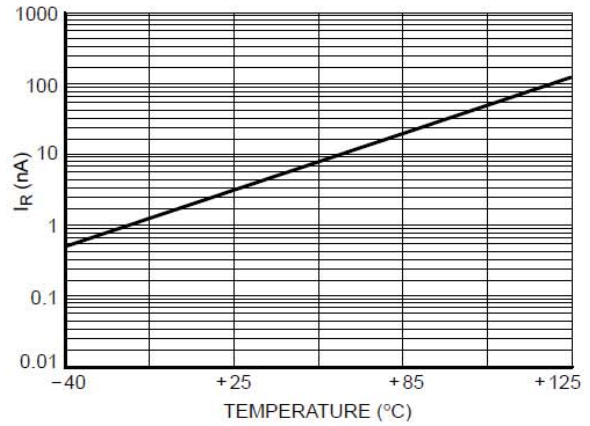


Figure 2. Typical Leakage Current versus Temperature

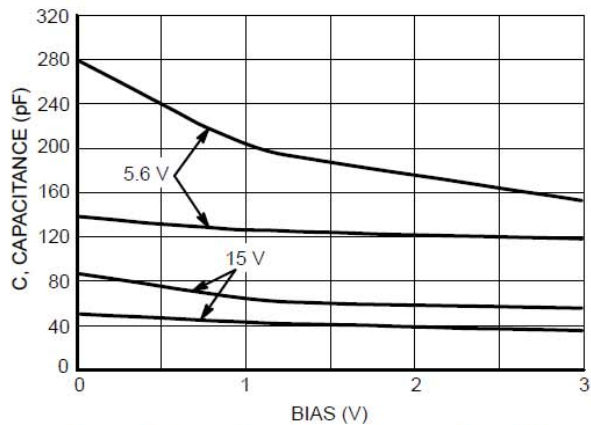


Figure 3. Typical Capacitance versus Bias Voltage

(Upper curve for each voltage is unidirectional mode, lower curve is bidirectional mode)

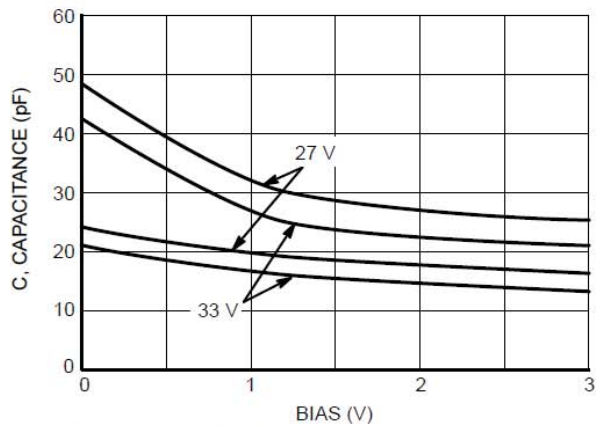


Figure 4. Typical Capacitance versus Bias Voltage

(Upper curve for each voltage is unidirectional mode, lower curve is bidirectional mode)

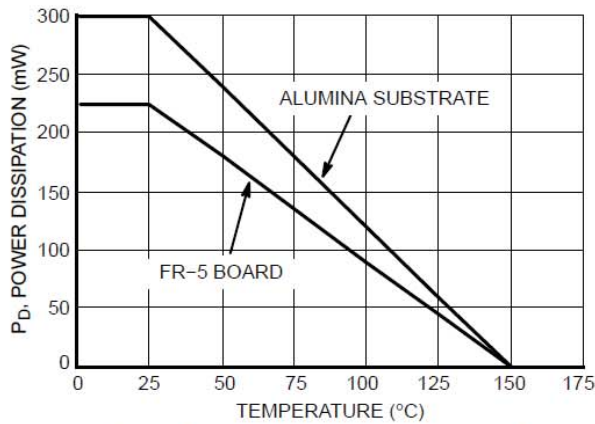


Figure 5. Steady State Power Derating Curve

RATING AND CHARACTERISTICS CURVES (TEPxxAL)

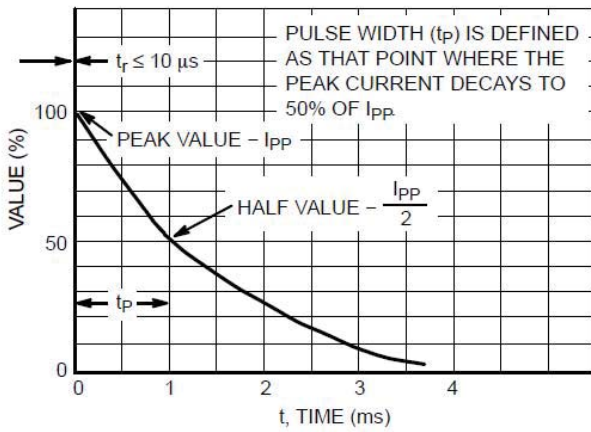


Figure 6. Pulse Waveform

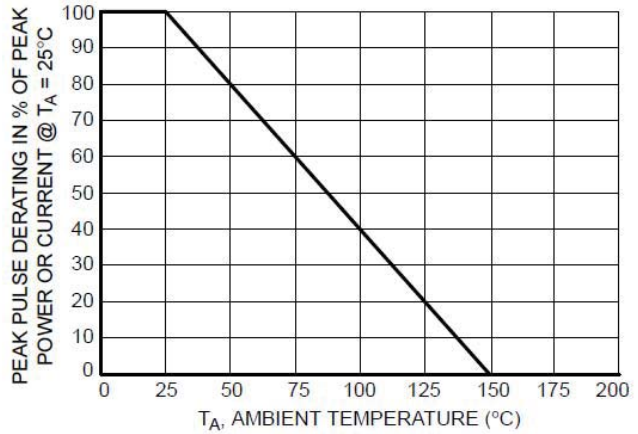


Figure 7. Pulse Derating Curve

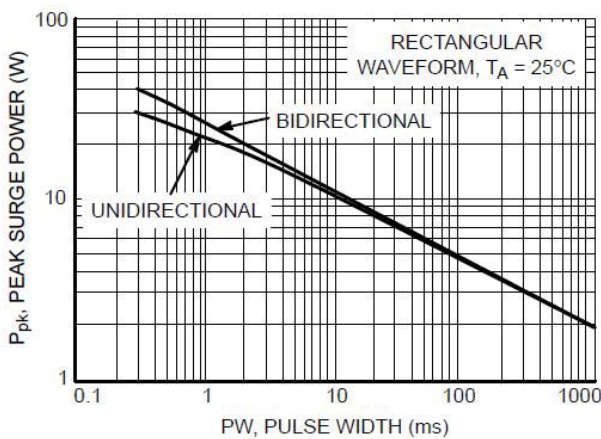


Figure 8. Maximum Non-repetitive Surge Power, P_{pk} versus PW

Power is defined as $V_{RSM} \times I_Z(pk)$ where V_{RSM} is the clamping voltage at $I_Z(pk)$.


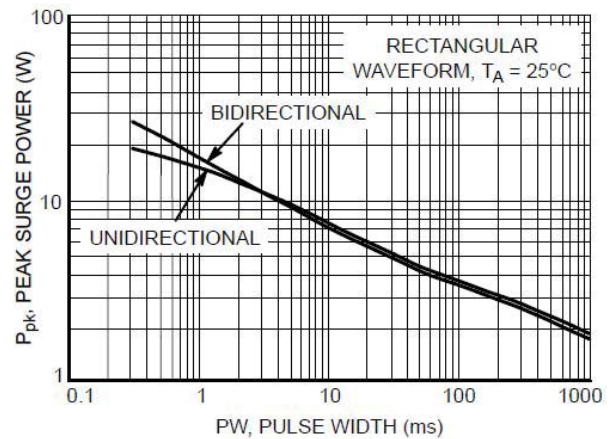


Figure 9. Maximum Non-repetitive Surge Power, $P_{pk(NOM)}$ versus PW

Power is defined as $V_Z(NOM) \times I_Z(pk)$ where $V_Z(NOM)$ is the nominal Zener voltage measured at the low test current used for voltage classification.

SOT-23 PACKAGE OUTLINE DIMENSIONS

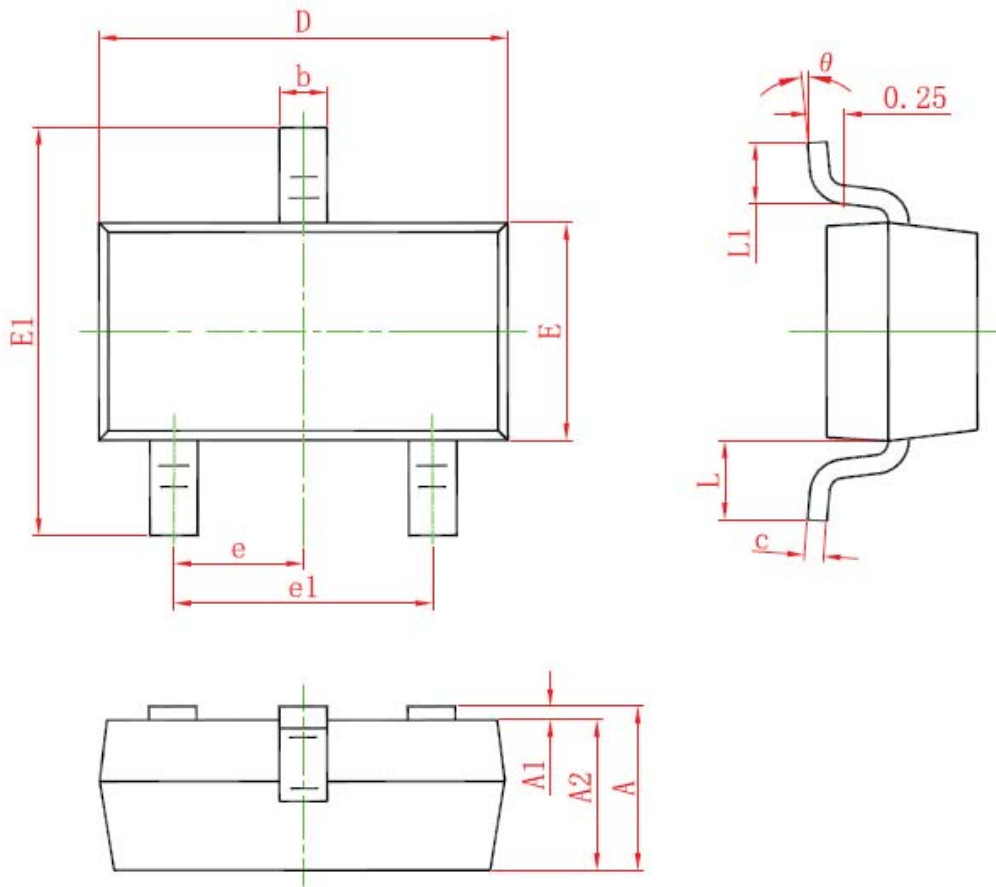

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.900	1.150	0.035	0.045
A1	0.000	0.100	0.000	0.004
A2	0.900	1.050	0.035	0.041
b	0.300	0.500	0.012	0.020
c	0.080	0.150	0.003	0.006
D	2.800	3.000	0.110	0.118
E	1.200	1.400	0.047	0.055
E1	2.250	2.550	0.089	0.100
e	0.950 TYP.		0.037 TYP.	
e1	1.800	2.000	0.071	0.079
L	0.550 REF.		0.022 REF.	
L1	0.300	0.500	0.012	0.020
θ	0°	8°	0°	8°

DISCLAIMER NOTICE

Rectron Inc reserves the right to make changes without notice to any product specification herein, to make corrections, modifications, enhancements or other changes. Rectron Inc or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies. Data sheet specifications and its information contained are intended to provide a product description only. "Typical" parameters which may be included on RECTRON data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. Rectron Inc does not assume any liability arising out of the application or use of any product or circuit.

Rectron products are not designed, intended or authorized for use in medical, life-saving implant or other applications intended for life-sustaining or other related applications where a failure or malfunction of component or circuitry may directly or indirectly cause injury or threaten a life without expressed written approval of Rectron Inc. Customers using or selling Rectron components for use in such applications do so at their own risk and shall agree to fully indemnify Rectron Inc and its subsidiaries harmless against all claims, damages and expenditures.